



KR AUDIO ELECTRONICS HI VACUUM TUBE

KR 2A3

General data

Filament specifications: AC Voltage 2,5 V
AC Current 2,5 A


Amplification Factor 5,3

Power Amplifier class A1

Maximum
DC Plate Voltage 350 V
Dissipation 18 W

DC Plate Voltage 250 V
DC Plate Current 70 mA
Grid Voltage -45 V
Plate Resistance 1100 ohm
Transconductance 4,8 mA/V

CONNECTION OF THE VALVE BASE KR 2A3

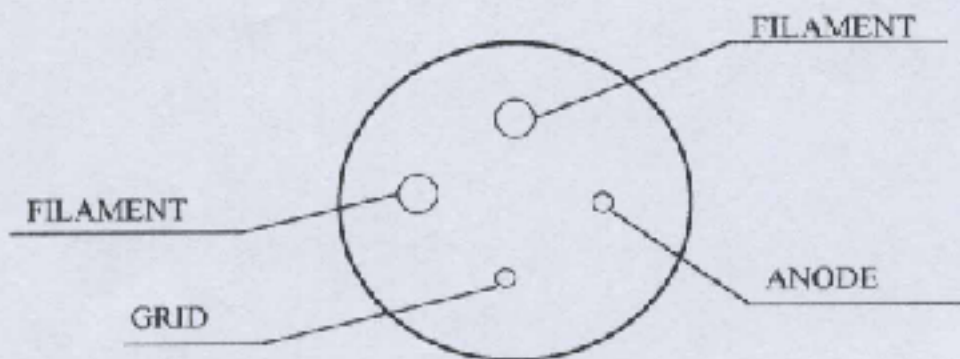

VIEW FROM BELOW

KR AUDIO USA, Harwil Group
Exclusive USA Distributor
8390 E. Via De Ventura
F110-194
Scottsdale, Arizona 85258
1-888-593-8488 x121
www.kraudiousa.com

