



KR AUDIO ELECTRONICS HI VACUUM TUBE

KR 300BXL5

General data

Filament specifications:	DC/AC Voltage	5 V
	DC/AC Current	1.8 A

Amplification Factor	3,7
----------------------	-----


Power Amplifier class A1

Maximum

DC Plate Voltage	600 V
Dissipation	70 W
DC Plate Current	160 mA

DC Plate Voltage	450 V
DC Plate Current	100 mA
Grid Voltage	-94 V
Plate Resistance	650 ohm
Transconductance	5,7 mA/V

CONNECTION OF THE VALVE BASE KR300BXL5

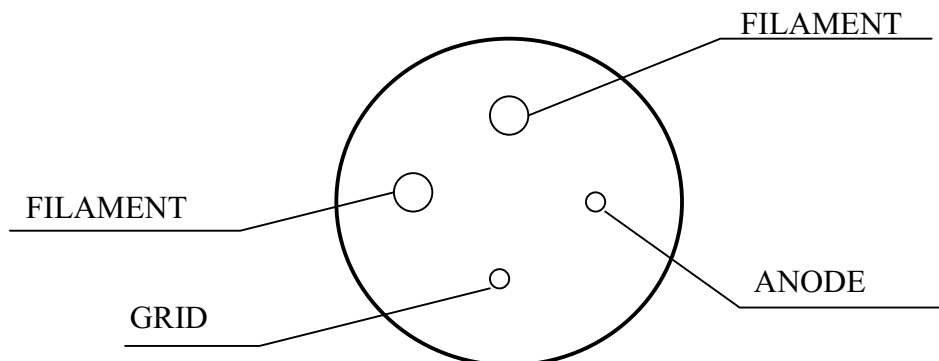

VIEW FROM BELOW

KR AUDIO USA, Harwil Group
Exclusive USA Distributor
8390 E. Via De Ventura
F110-194
Scottsdale, Arizona 85258
1-888-593-8488 x121
www.kraudiousa.com

Plate characteristics KR 300BXLs

